

Foot Valve & Strainer

Flanged PN10, Cast Iron Body, Stainless Steel 8mm Screen, Cast Iron Disc, EPDM Seal with Back Seat



Pressure / Temperature Specifications


Pressure	PN10
Temperature	-10°C to 90°C

Dimensions

DN	D1	H	D	K	n x d	Kg	Kvs
2"	180	175	165	125	4 x 19	9.5	47.0
2½"	200	215	185	145	4 x 19	12.5	55.1
3"	240	265	200	160	8 x 19	18.0	149.4
4"	270	315	220	180	8 x 19	26.0	236.5
5"	310	335	250	210	8 x 19	32.0	359.1
6"	360	415	285	240	8 x 23	43.0	501.0
8"	440	500	340	295	8 x 23	74.0	858.0
10"	520	625	395	350	12 x 23	107.0	1349.0
12"	570	785	445	400	12 x 23	150.0	1887.0

Material Specifications

1. Body	EN GJL 250 Cast Iron
2. Cover	EN GJL 250 Cast Iron
3. Disc	EN GJL 250 Cast Iron
4. Stem	420 Stainless Steel
5. Gasket	EPDM
6. Hex Bolt	A3A Steel
7. Screen	304 Stainless Steel
8. Screw	A2 Steel

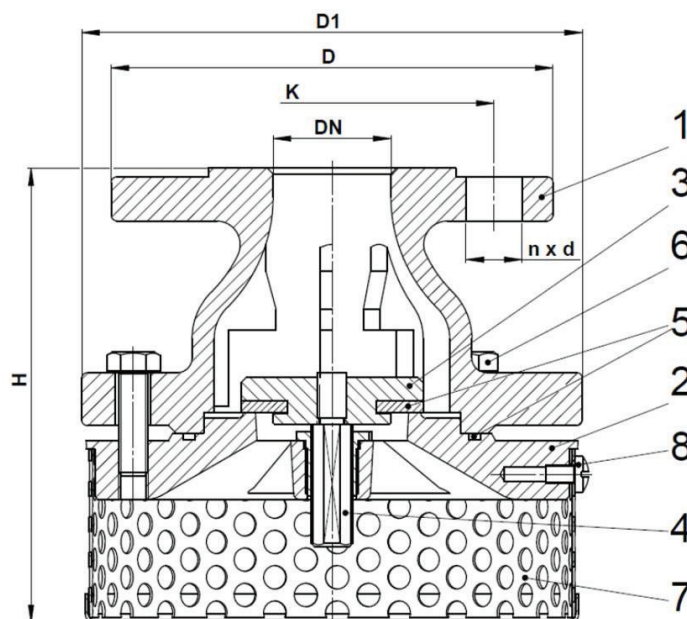

Last updated 18/11/2019

